



关注官方微信 获取更多详情

伟马快德机电科技（上海）有限公司
上海市松江区明南路85号8号楼，
201613
电话：+86/ (0)21/ 5774 0022
传真：+86/ (0)21/ 5774 6601
网址：www.werma.com
邮箱：info@werma.com.cn

WERMA (Shanghai) Co., Ltd.
Building 8, No. 85 Mingnan Road,
Songjiang, Shanghai, P.R.C.
201613
Phone: +86/ (0)21/5774 0022
Fax: +86/ (0)21/5774 6601
www.werma.com
info@werma.com.cn



808

Dimensions (Φ× Height): 71mm(Φ)×77mm (Base mounting)
71mm(Φ)×117mm (Tube mounting)

Voltage 12VDC, 24VDC, 230VAC

Connection Quick connect terminals

Light effect Permanent, Flashing

Life duration 50,000 hours

Newest 70mm Beacon — 808 series



Newest 70mm Beacon— 808 series

In 2018, WERMA Shanghai initiated a modification on our existing 808 series beacon. This modification provided not only to a new facelift of the design cosmetically but also improved on its robustness.


WERMA new generation 808 series beacon bring to you the new experience with improvement on the performance that display a more distinctive light effect that meet most of the versatile application needs.

Versatile design
Enhance customers product image with professional outlook

Full LED Flashing
Increase safety awareness and durable

IP65
Ideal product for industrial applications

Dual mounting options (Base & Tube)
Provide flexible mounting needs

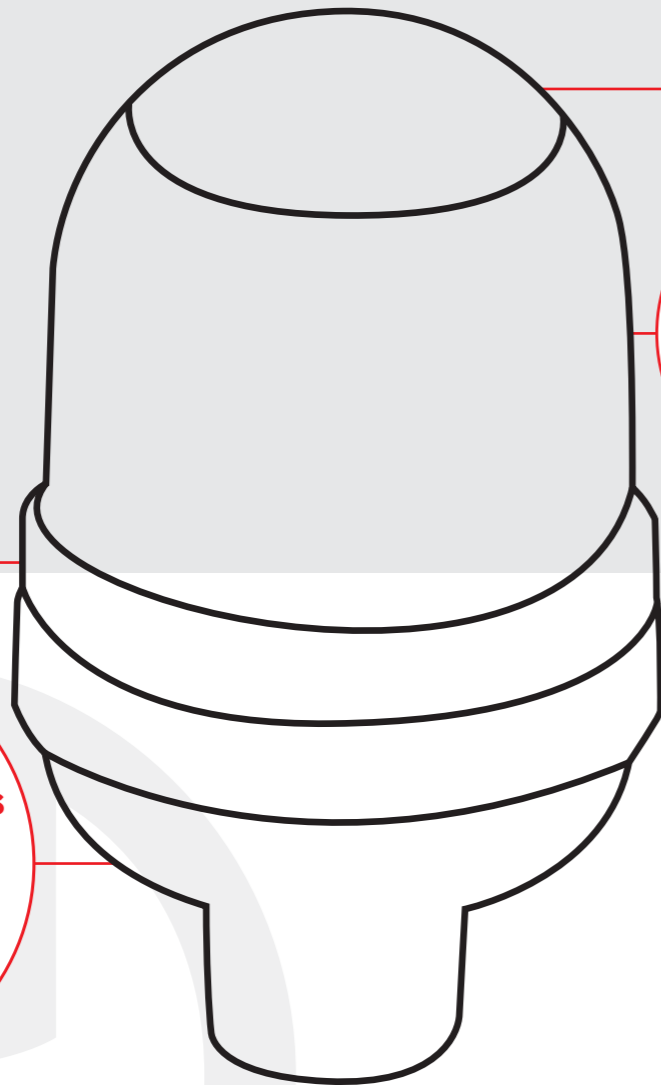

Technical Specifications/ Order Specifications:

Dimensions (Φ× Height):	71mm(Φ)×77mm (Base mounting) 71mm(Φ)×117mm (Tube mounting)
Housing:	pc/abs-blend
Life duration:	50,000 hours
Protection rating:	IP65

LED Permanent light element (Base mounting)

Voltage:	24VDC
Current Consumption:	≤45mA
Red	808 159 55
Green	808 259 55
Yellow	808 359 55
White	808 459 55
Blue	808 559 55

LED Permanent light element (Base mounting)

Voltage:	230VAC
Current Consumption:	≤20mA
Red	808 159 68
Green	808 259 68
Yellow	808 359 68
White	808 459 68
Blue	808 559 68

LED Permanent light element (Tube mounting)

Voltage:	24VDC
Current Consumption:	≤45mA
Red	808 169 55
Green	808 269 55
Yellow	808 369 55
White	808 469 55
Blue	808 569 55

LED Permanent light element (Tube mounting)

Voltage:	230VAC
Current Consumption:	≤20mA
Red	808 169 68
Green	808 269 68
Yellow	808 369 68
White	808 469 68
Blue	808 569 68

LED Flashing light element (Base mounting)

Voltage:	12VDC
Current Consumption:	≤95mA
Red	808 179 54
Yellow	808 379 54

LED Flashing light element (Base mounting)

Voltage:	24VDC
Current Consumption:	≤70mA
Red	808 179 55
Yellow	808 379 55

LED Flashing light element (Tube mounting)

Voltage:	12VDC
Current Consumption:	≤95mA
Red	808 189 54
Yellow	808 389 54

LED Flashing light element (Tube mounting)

Voltage:	24VDC
Current Consumption:	≤70mA
Red	808 189 55
Yellow	808 389 55

Accessories:

- Side bracket for base mounting with concealed cable entry
- Side bracket for base mounting, incl. cable gland
- Side bracket for tube mounting, incl. cable gland
- Base with integrated tube (Φ25mm, 110mm long)
- Tube Φ25mm, all anodized aluminum
 - 100mm
 - 250mm
 - 400mm
 - 800mm
- Base for tube Φ25mm, Plastic
- Base for tube Φ25mm, metal
- Foldaway base suit to Φ25mm, tube

- 960 009 07
- 960 009 02
- 960 009 01
- 975 849 11
- 975 849 10
- 975 849 25
- 975 849 40
- 975 849 80
- 975 849 90
- 975 849 91
- 960 009 12

