



关注官方微信 获取更多详情

伟马快德机电科技（上海）有限公司
上海市松江区明南路85号8号楼
201613
电话：+86/ (0)21/ 5774 0022
传真：+86/ (0)21/ 5774 6601
网址：www.werma.com
邮箱：info@werma.com.cn

WERMA (Shanghai) Co., Ltd.
Building 8, No. 85 Mingnan Road,
Songjiang, Shanghai, P.R.C.
201613
Phone: +86/ (0)21/5774 0022
Fax: +86/ (0)21/5774 6601
www.werma.com
info@werma.com.cn

RST56 Signal Towers

Voltage 24V DC(Positive and negative logic)

Ingress protection IP66/IP69K

Light: LED permanent

Sound Max90dB (Adjustable, Pulse/continuous tone)

RST 56 Signal Tower

— Additional Transparent
Housing, Strengthened Safety



RST 56 Signal Tower

Additional Transparent Housing
Strengthened Safety, extends its duration

Dual mounting options:
Base/Tube/Foldable /installation


IP66/IP69K
Ideal for industrial environments

Adjustable buzzer
Max90dB, Dial code to adjust

360° STRONG VISIBILITY
FROM ALL THE POSITION



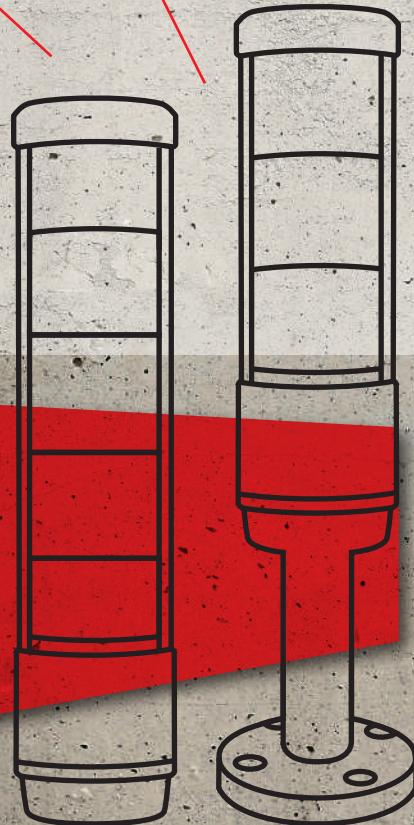


2-5 TIERS PLUS BUZZER AS OPTION
MATCH MAJORITY APPLICATION

In 2021, based on customer needs and market trends, RST56 came into being. RST56 is a pre-assembled signal tower with white housing and 2 to 5 layers for customers to choose. Unlike conventional signal tower appearance, RST56 has an extra layer of transparent protective housing, which not only improves the appearance identification and beauty, more importantly, it strengthens the protection of the signal tower and extends its duration. RST56 supports a variety of installation methods such as flat surface, tube type, folding bracket, and hole thread (base mounting, tube mounting, foldable base mounting, installation), etc. Customers can choose according to actual needs. The protection level of IP66/IP69K meets the application of most industries and specific food industry and pharmacy production and packaging industry. RST56, which has a soft but bright luminous lighting effect, will surely become the extra glamor of your equipment.



Base/Tube mounting	
GN/RD	686 260 05
GN/RD/Buzzer	686 260 35
GN/YE/RD	686 370 05
GN/YE/RD/Buzzer	686 370 35
BU/GN/YE/RD	686 480 05
BU/GN/YE/RD/Buzzer	686 480 35
WH/BU/GN/YE/RD	686 590 05
WH/BU/GN/YE/RD/Buzzer	686 590 35
GN/YE/RD/bracket	686 371 05
GN/YE/RD/Buzzer/bracket	686 371 35

Installation	
GN/RD	686 263 05
GN/RD/Buzzer	686 263 15
GN/YE/RD	686 373 05
GN/YE/RD/Buzzer	686 373 15
BU/GN/YE/RD	686 483 05
BU/GN/YE/RD/Buzzer	686 483 15
WH/BU/GN/YE/RD	686 593 05
WH/BU/GN/YE/RD/Buzzer	686 593 15

Accessories		
	Base with integrated tube (Ø25mm, 110mm long, plastic, incl. rubber seal)	975 849 11
	Tube with cable gland, Ø25mm	
	100mm	975 849 10
	250mm	975 849 25
	400mm	975 849 40
	800mm	975 849 80
	Base for tube mounting (Ø25mm, plastic, incl. rubber seal)	975 849 90
	Foldable base for tube mounting (Match Ø25mm aluminum tube)	960 009 17
	Bracket for base mounting with concealed cable entry (incl. rubber seals)	960 009 01

